Truck Bed Liner

A complete guide from measuring to installing your new truck bed liners.





ValleyRubber.Solutions

Truck Bed Liner Guide

© Valley Rubber, LLC 3899 Highway. 31 North Falkville, Al 35622 Phone 256.784.5231 • Fax 256.784.5232 ValleyRubber.Solutions 2010 Rev. 1.1

Table of Contents

Getting Started	Page 1
Types of truck beds	
Dual Slope Data Sheet	Page 2
Flat Floor Data Sheet	Page 3
"V" Bottom Data Sheet	Page 4
Measuring The Truck Bed	Page 5
Measuring Procedures	
Measuring the Flats	
Measuring The Truck Bed (Cont.)	. Page 6
Measuring Procedures	
Measuring the Slants	
Measuring The Truck Bed (Cont.)	. Page 7
Measuring Procedures	
Measuring for the Bevels	
Measuring the angles	
Installing the Truck Bed	. Page 8
Procedure of installation	
Installing the Truck Bed (Cont.)	. Page 9
Fastening the Truck Bed Liners	
Installing the Truck Bed (Cont.)	. Page 10
Plugs	
Tail Bar	
Warranty Information	Page 11

Introduction

Valley Rubber manufactures Haul Truck Bed Liners for all size truck bodies – historically we have lined 25ton up to 360-ton trucks. We can effectively line heated and non-heated beds, offering extreme abrasion resistance and reducing metal fatigue and eliminates stress fractures, while increasing driver comfort and reducing noise. The easy-to-install liner system is cost effective and maintenance free compared to steel liners, increasing equipment availability. Quiet and reliable, our "Gorilla Tough" bed liners extend the life of your equipment for the long haul. Our design makes for easy installation and replacement, also known as Truck Bed Liners.





o begin the process of installing your truck bed liners, you will need to provide Valley's Rubber's CAD department with necessary information concerning the measurement of the truck bed. The following will include application data sheets and installation instruction.

Types of Truck Beds

Below are the three basic floor types.



Dual Slope: Is a bed consisting of slopes from each side and tail end slope


(Refer to "A" Data sheet)

Flat Floor: The area of the bed to be lined is typically flat, and on some models one slope at the tail of the truck.

(Refer to "B" Data sheet)

"V" Bottom: Is a bed consisting of a left side slope and a right side slope forming a "V" shape looking down the tail of the bed.


(Refer to "C" Data sheet)



Dual Slope Truck Bed Liner Data Sheet


	End User Information
	End User:
	Address:
	City:
	State: ZIP:
	Distributor Information
	Distributor:
	Contact:
	Phone:
	Fax:
	Technical Information
	Is the Box Heated? Yes or No
	Please Circle One
	Indicate with an "X" on the Data
	Sheet where the heated exhaust enters the bed.
	Truck Make:
TAIL	
	Truck Model:
	Truck Series:
*TRUCK FLOOR	
	Notes:
	For Assistance Please Call
SIDE BEVEL FRONT BEVEL	1.800.622.5667

A



Flat Floor Truck Bed Liner Data Sheet

	Ŧ	End User Information
		End User:
		Address:
		City:
		State: ZIP:
		Distributor Information
		Distributor:
TRUCK BED FLOOR		Contact:
		Phone:
		Fax:
	*FLOOR ANGLE	Technical Information
		Is the Box Heated? Yes or No
		Please Circle One
		Indicate with an "X" on the Data
· • • • • • • • • • • • • • • • • • • •		Sheet where the heated exhaust enters the bed.
		Truck Make:
*1	AIL	Truck Model:
SIDE WALL	HEAD WALL	Truck Series:
↓ † ▶ , ┍╾		
		Notes:
↑	<u> </u>	
SIDE BEVEL	FRONT BEVEL	
*Tail piece does not apply to all Flat Floor	Trucks. If the floor does not angle, please	For Assistance Please Call
enter " NA " on the fields at	ove for the Tail dimensions.	1.800.622.5667



"V" Bottom Truck Bed Liner Data Sheet

C

			End User Information
	H I		End User:
•			Address:
			City:
			State: ZIP:
			Distributor Information
			Distributor:
			Contact:
	LEFT SIDE	RIGHT SIDE	E Phone:
			Fax:
			Technical Information
			Is the Box Heated? Yes or No
			Please Circle One
			Indicate with an "X" on the Data
			Sheet where the heated exhaust
Ļ			enters the bed.
			Truck Make:
		SIDE WALL	
			Truck Model:
			LINER THICKNESS Truck Series:
		↑	Truck Series:
	0	HEAD WALL SIDE E	BEVEL Notes:
l		★	
TRUC	K FLOOR	1	
		FRONT	For Assistance Please Call 1.800.622.5667

Measuring the Truck Bed

B efore measuring your truck bed you will need to remove all debris and material build. Check the bed for areas that would jeopardize a successful stud weld. These are areas such as, cracks, voids and weld bead that would interfere with stud welding. You will need to note any locations on the data sheet, so that a stud will not be located in that particular spot. If the bed is too damaged it could void the warranty. If there are questions about the quality of the truck bed, please call Valley Rubber for assistance.

Tools Needed			
	Tape Measure		
	Spool of String		
	Carpenter's Square		
	Angle Finder		




Measuring Procedures

Measuring the Flats

All of these measurements should be taken with the tape measure flush to the floor.


Always start your measurements at the transition point where the floor meets the cant. This is the point where the cant meets the floor.

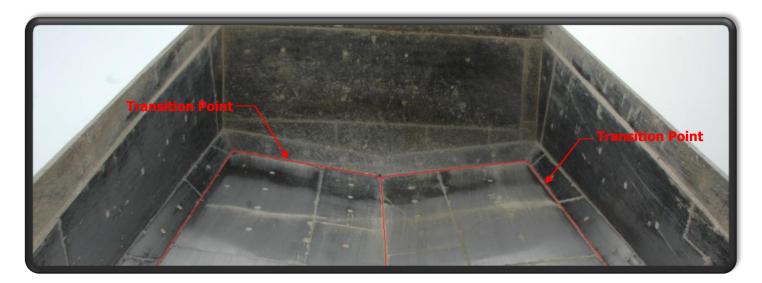


Measuring Procedures (cont.)

Measuring the slants

Start the string at the center of the floor and front cant of the bed and run it perpendicular using a square. (See diagrams below)

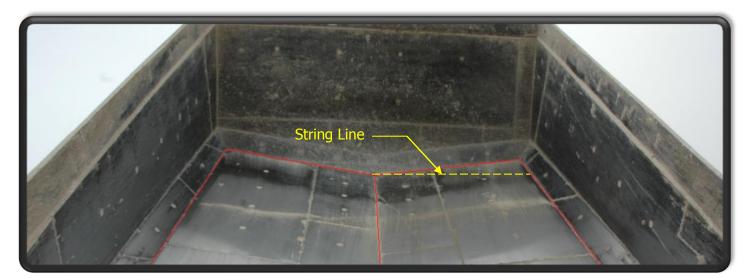

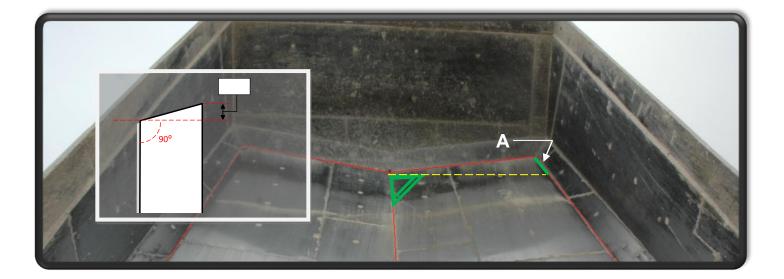


You will need to measure the end of the line to the corner of the floor and the cant, to get the dimension for "A".

Measuring Procedures (cont.)


Measuring for the liner bevels

Measuring for the rubber bevels is quite easy. First you will need to know what the overall thickness of the liner will be, this will provide a starting point. Set the square on the floor and let it pivot at the transition line with the straight edge facing toward the side of the bed where you are working. Next take your tape measure and bring it up to your overall liner thickness on the square and extend it out to the side wall, record this measurement as shown below. (See diagram)

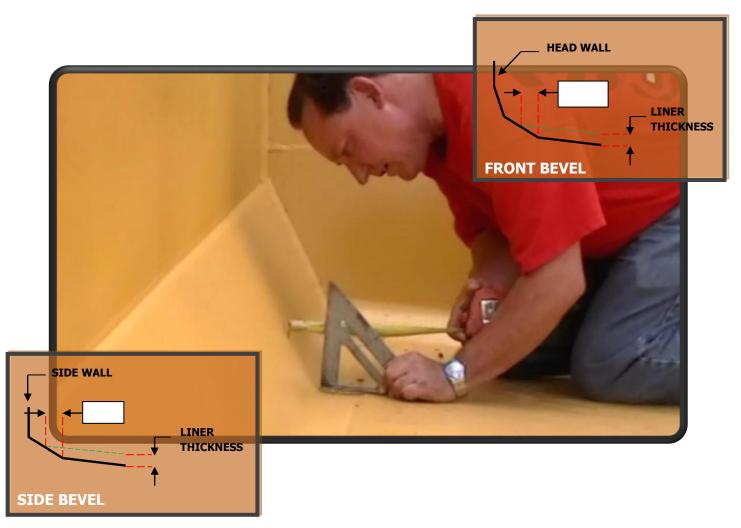

Measuring the angles

If you are measuring a "V" Bottom or Flat Floor with an angle, then you will need to provide the pitch or angle. To do this, simply use an angle finder and enter the degree in the space provided on the data sheet.

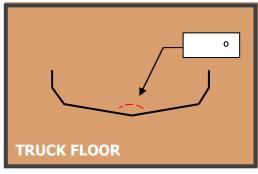


Installing the Truck Bed

Procedure of installation



Before the liners are shipped to your destination, they are palletized and stacked for easy installation and all of the necessary hardware is bundled in sealed containers. The first liner to be installed is right on top of the stack – the last liner to be installed is on the bottom.

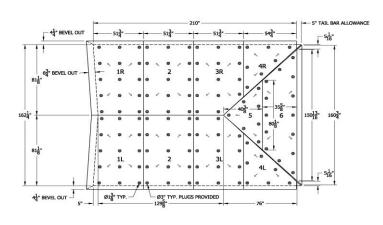



Each liner has threaded lugs to attach eye bolts for ease of lifting and positioning liners. Each system comes with an easy to follow liner map that directs the placement of each piece. The first liners to be installed are nearest the cab and typically have beveled edges where they meet the walls; once these are positioned with the help of a boom, the remaining liners should be placed next to the previous liner snugly.



Installing the Truck Bed (cont.)

Fastening the Truck Bed Liners

Once all the liners are in place, it's time to fasten them down. You will have a container which includes your hardware for each system, separate the hardware. If necessary prep the floor of the bed, through the mounting holes with a wire brush or needle gun to remove any rust or debris that would prevent a good stud weld.

Next you will need to apply the threaded studs to the floor through each mounting hole.





After you have finish welding the studs through each mounting hole you will need to drop a washer over each stud followed by a nut and then securely tightened using a pneumatic drill.





Installing the Truck Bed (cont.)

Rubber Plugs

Now you are ready to insert the provided rubber plugs to protect the studs and hardware. To do this, hammer the plugs into the holes, if they are being stubborn spray some water on the plugs and they should slip right in.



Tail Bar

The tail bar is installed flush against the back edge of the liners at the tail of the truck body. You will need to use the stud welder and hardware provided to secure it to the bed. When placing the tail bar for welding it will need a 1" - 2" gap between each bar. If you choose, you can use the holes in the tail bar to plug weld to the bed instead of using the studs.



Inspection

Now that you have fastened the liners down and completed the tail bar, it would be a good idea to go back and double check your work. Make sure all holes are studded and plugged and that the tail bar is tight against the liners. You are now complete with installing the Truck Bed liner. We know that it will provide you with years of maintenance free reliability and Gorilla Tough performance.

Warranty Information

End User:		_ 1	nstall D	ate:	/	· /	/
Address:		[Dealer:				
		_ (Contact:				
Truck Model:							
Is the box heated? Yes \Box or No \Box (Please Chec	k one)					
Where does the heated exhaust enter th	ne bed? _				_		allev
Type of material:					-		RER
Maximum material size: Dro	p height:				_	Gorilla Tough f	or Mining & Aggregate
Truck – hours of operation			/ W	eek			
Anticipated Life:		_ / Hr	5.				
Rank	Abrasiv	eness	of Mat	terial			
1 2 3 4	5	6	7	8	9	10	
Light	Mod	lerate	2			Sev	ere
Compared to Steel		[Compa	ared to	Rubbe	er	
Brinell Hardness BHN			Manufa	cturer _			
Cost			Cost				
Thickness			Thickne	ess			
Life Hrs.			Life				Hrs.

Cost Effective Warranty

When properly installed and maintained, the cost of Valley Rubber products will be less than the competitors in the same application for the same period and usage. This is a wear life warranty and is only applicable when an Application Information Sheet is submitted and approved before placing the order. A prorated adjustment will be made if the life cost is not equal to or better than the competitor.